


# Control of Service Context using the SIP Request-URI

Ben.Campbell@wcom.com  
Robert.Sparks@wcom.com

# The Request-URI can communicate context to an application.

Example : Voice Mail

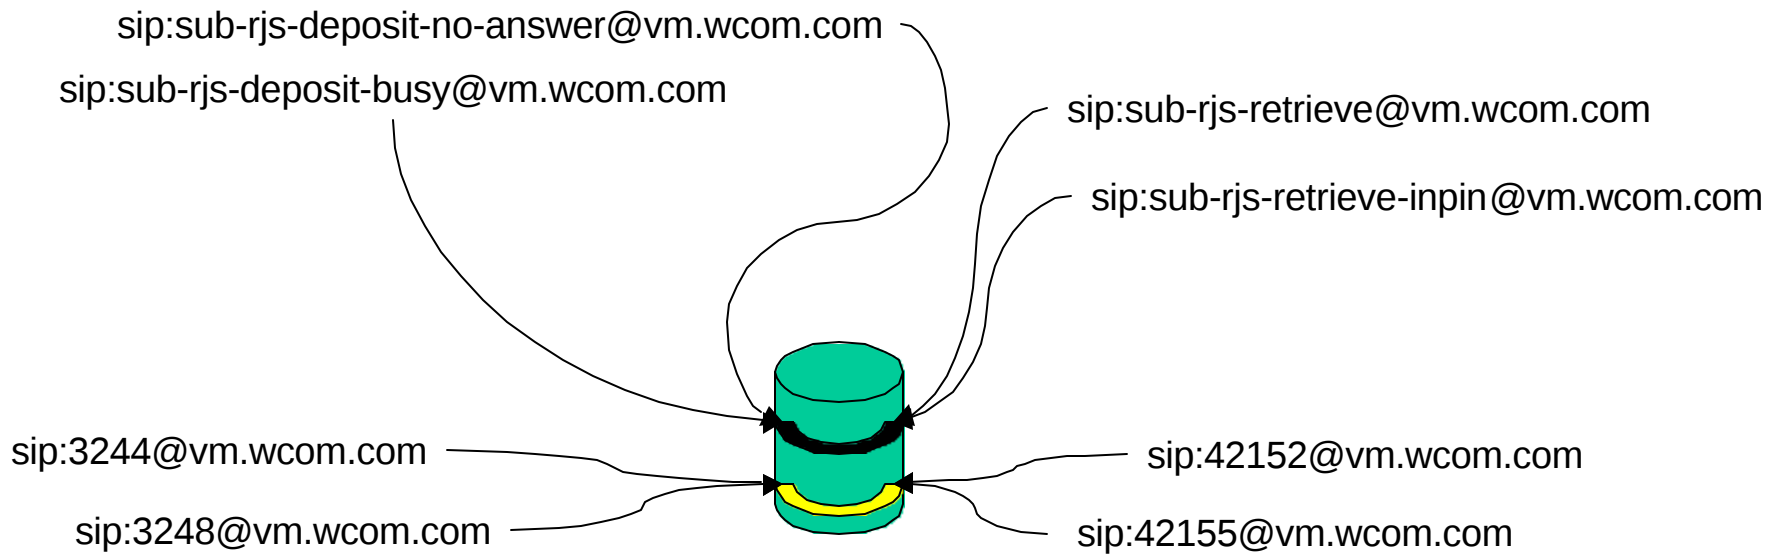

- Allows a proxy to control the initial state of a service
- By not mining the URI, facilitates
  - Interchangeable service implementations
  - Rapid deployment of new services

Future work?